



Floor standing electric water heater up to 300L for big needs

Features

- / Elegant design
- / Titanium enamelling
- / Magnesium anode
- / Easily removed inspection flange
- / High IP protection rating

Energy Class



TECHNICAL DATA

		ARI 200 V	ARI 200 MO	ARI 300 MO	ARI 200	ARI 300
Model		Single-Phase	Single-Phase	Single-Phase	Single-Phase/ Tri-Phase	Single-Phase/ Tri-Phase
Capacity	l	200	200	300	200	300
V40 (Qty of mixed DWH at 40°C)*	l	359	356	525	356	525
Output	kW	2,2	3	3	3	3
Voltage	V	230	230	230	230/400	230/400
Heating time (ΔT= 45°C)	hh:mm	04:28	04:26	05:54	04:26	05:54
Max. operating temp.	°C	75	70	70	70	70
Heat dispersion at 65°C	kWh/24h	1,76	1,88	2,6	1,88	2,6
Max. operating pressure	bar	8	6	6	6	6
Net weight	kg	49	50	71	50	71
Protection	IP	X5	X5	X5	X5	X5

DIMENSIONS

a	mm	-	1300	1820	1300	1820
b	mm	-	570	570	570	570
c	mm	-	365	365	365	365
d	mm	-	630	630	630	630

* Set Point Temperature: 65°C

CODE


	3000566	3000618	3000619	3000620	3010871
Energy class	C	C	C	C	C
Tapping profile	L	L	L	L	L

ACCESSORIES


	Code
Hydraulic Safety group 3/4"	877085
Hydraulic Safety group 1"	885516
Siphon 1"	877086

NOTE: The Nominal capacity listed in this catalogue identifies the product category.
The actual product capacity is listed in the relative technical documentation.

200 V (murale)

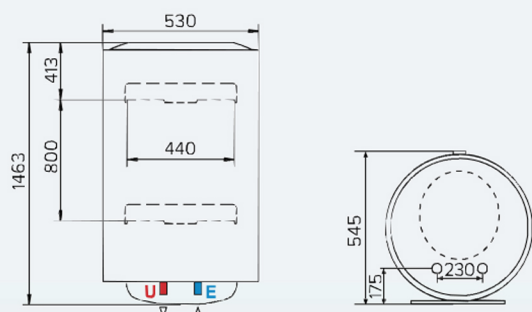

200-300 (a basamento)

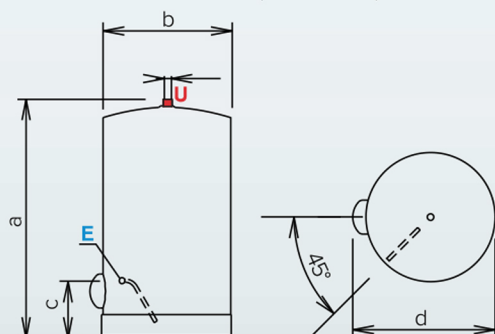

KEY

- E \ Cold water inlet G 3/4" (200-300) G 1" (500)
- U \ Domestic hot water outlet G 3/4" (200-300) G 1" (500)