

Pro1 R



WATER PLUS



EXTERNAL TEMPERATURE REGULATION



DOUBLE SAFETY THERMOSTAT



TITAN SHIELD



HIGH EFFICIENCY INSULATION



ITALIAN DESIGN

Electric storage water heater

/ High performances: Up to 16% more hot water available with Waterplus technology

Features

- / External temperature setting
- / Double safety thermostat

Energy Class



DIMENSIONS

1,5 kW	PRO1 R 50 V	PRO1 R 80 V	PRO1 R 100 V	PRO1 R 50 H	PRO1 R 80 H	PRO1 R 100 H
A mm	543	748	900	543	748	900
B mm	163	163	163	-	-	-
C mm	-	-	-	163	178	178
D mm	-	-	-	159	334	486

1,8 kW	PRO1 R 50 V 1,8K PL	PRO1 R 80 V 1,8K PL	PRO1 R 100 V 1,8K PL	PRO1 R 65 V 1,8K PL EU	PRO1 R 80 V 1,8K PL EU	PRO1 R 100 V 1,8K PL EU	PRO1 R 120 V 1,8K PL	PRO1 R 150 V 1,8K PL
A mm	543	748	900	665	748	900	1108	1283
B mm	163	163	163	163	-	166	166	164
C mm	-	-	-	-	178	178	-	-
D mm	-	-	-	-	334	486	-	944

2 kW	PRO1 R 50 V 2K	PRO1 R 80 V 2K	PRO1 R 100 V 2K	PRO1 R 80 H 2K
A mm	-	543	748	900
B mm	-	163	163	163
C mm	-	-	-	178
D mm	-	-	-	334

3 kW	PRO1 R 80 H 3K EU	PRO1 R 100 H 3K EU
A mm	748	900
C mm	178	178
D mm	334	486

NOTE: The Nominal capacity listed in this catalogue identifies the product category. The actual product capacity is listed in the relative technical documentation.



* Patented in Spain, patent pending in IT, FR, TK, RU, CN, VN, UAE

** Maximum estimated saving, depending on models. Comparison made using V40 test results at maximum operating temperature between current ATG products and new ATG products equipped with WaterPlus Technology.

Pro1 R

1,2 - 1,5 kW - TECHNICAL DATA	PRO1 R 50 V	PRO1 R 80 V	PRO1 R 100 V	PRO1 R 50 H	PRO1 R 80 H	PRO1 R 100 H
Installation	V	V	V	H	H	H
Nominal Capacity	L	50	80	100	50	80
Max working pressure	bar	8	8	8	8	8
Power	KW	1,5	1,5	1,5	1,2	1,5
Voltage	V	220-240	220-240	220-240	220-240	220-240
IP class	IP	IPX3	IPX3	IPX3	IPX1	IPX1
Max working temp	°C	75	75	75	75	75
Heat dispersion 65°C	KWh/24h	0,99	1,35	1,56	1,2	1,48
Heating time ΔT 45C	hh:mm	01:45	02:37	03:19	02:11	02:37
Weight	Kg	16	20,5	24	16	20,5

CODE	3201435	3201436	3201437	3201438	3201439	3201440
CODE	3201824	3201826	3201828	3201830	3201831	3201935

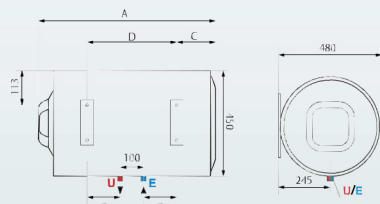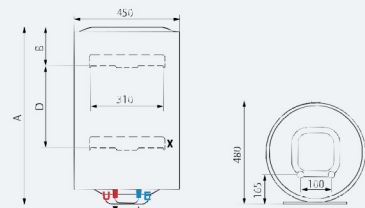

KEY

- E \ Cold water inlet G 1/2"
- U \ Hot water outlet G 1/2"
- X \ Additional bottom fixing bracket only for 150 Lt model